



REPLY TO  
ATTENTION OF:

**DEPARTMENT OF THE ARMY**  
**SAVANNAH DISTRICT, CORPS OF ENGINEERS**  
100 W. OGLETHORPE AVENUE  
SAVANNAH, GEORGIA 31401-3640

## **PUBLIC NOTICE**

### **Savannah District 2012 Nationwide Permit Regional Conditions (RCs)**

On February 21, 2012, the U.S. Army Corps of Engineers (USACE) published the notice in the *Federal Register* (76 FR 9174) announcing the reissuance of 48 of the 49 existing Nationwide Permits (NWP), general conditions, and definitions with some modifications. The USACE also issued two new NWPs, three new general conditions, and three new definitions. The NWPs will be effective on March 19, 2012, and will expire on March 18, 2017. On March 30, 2012, the USACE South Atlantic Division Commander approved Savannah District's RCs (Encl 1). All uses of a NWP in Georgia must comply with all applicable NWP general conditions and RCs. The RCs are available at <http://www.sas.usace.army.mil/regulatory/index.html>.

By letter dated March 12, 2012, (Encl 2), the Georgia Department of Natural Resources, Environmental Protection Division (Georgia EPD) issued a conditional Water Quality Certification for all of the NWPs, pursuant to Section 401 of the Clean Water Act.

By letter dated March 13, 2012, (Encl 3), the Georgia Department of Natural Resources, Coastal Resources Division (Georgia CRD) concurred with the USACE's Federal Consistency Determination for the NWPs pursuant to the Coastal Zone Management Act (CZMA). The Georgia CRD area includes Bryan, Brantley, Camden, Charlton, Chatham, Effingham, Glynn, Liberty, Long, McIntosh and Wayne Counties.

Enclosed is an index of the final NWPs, general conditions and definitions (Encl 4). The final NWPs, general conditions, further information, and definitions can be found at the following link <http://www.usace.army.mil/Missions/CivilWorks/RegulatoryProgramandPermits/NationwidePermits.aspx>.

#### Enclosures

1. Savannah District 2012 Regional Conditions
2. Georgia EPD 401 Water Quality Certification
3. Georgia CRD Federal Consistency Determination
4. Index of the Final Nationwide Permits

**SAVANNAH DISTRICT  
2012 NATIONWIDE PERMIT REGIONAL CONDITIONS**

A. The Georgia Department of Natural Resources (Georgia DNR) issued a conditional Water Quality Certification and conditional concurrence with the federal consistency determination under the Coastal Zone Management Act for reauthorization of the use of Nationwide Permits (NWP) to authorize impacts to waters of the United States (US) in Georgia. **The conditions include requirements that Georgia DNR be notified prior to beginning work on any and all NWP authorized projects.** Specifically, Georgia DNR requirements and notification procedures are set forth in Appendix A, which states that for uses of NWPs requiring submission of a Pre-Construction Notification (PCN) to the Savannah District prior to commencing work in waters of the United States (US), a copy of the PCN with project plans must also be submitted to the Georgia DNR, Environmental Protection Division (Georgia EPD) and, where applicable, to the Georgia DNR, Coastal Resources Division (Georgia CRD). For NWP authorized projects that do not require submission of a PCN to the Savannah District, a completed Georgia DNR Notification Form that is in Appendix A must be submitted to Georgia EPD and, where applicable, to Georgia CRD, prior to commencing work. Refer to Appendix A for detailed instruction on when and where to submit a PCN or a Georgia DNR Notification Form to Georgia DNR and/or Georgia CRD.

**B. Pre-Construction Notification:** (NOTE: In addition to the Savannah District's PCN requirements below, there are additional PCN requirements for certain uses of NWP 13, 18, 21, 22, 41, 51 and 52 that are listed in the Nationwide Permit Program, which is available at <http://www.sas.usace.army.mil/regulatory/index.html>.)

1. A PCN is required for all uses of NWPs 3(b), 7, 8, 11, 12, 14, 15, 17, 23, 27, 29, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 42, 43, 44, 45, 46, 48, 49, and 50.

2. A PCN is required for all uses of NWP 13 in perennial streams. (NOTE: Unless a specific type of stream is identified in a RC, the term "stream" includes ephemeral, intermittent and perennial streams.)

3. A PCN is required for use of NWPs 3(a), 3(c), 5, 6, 13, 19 and 41 for impacts to 0.1 acre or more of wetlands/open water and/or 100 linear feet or more of stream.

4. A PCN is required for all uses of NWPs within 2000 feet of a National Wildlife Refuge, any National Park Service property, a National Estuarine Research Reserve, a Georgia State Park or an approved mitigation bank.

5. A PCN is required for use of any NWP to construct a new utility line activity or a linear transportation project in waters of the US.

6. A PCN is required for all uses of NWPs in Habitat Areas of Particular Concern (HAPCs), a subset of Essential Fish Habitat. Relevant to projects occurring in Georgia's tidal waters, the South Atlantic Fishery Management Council designates oyster aggregations and tidal inlets as HAPCs.


**C. The Following Information must be Submitted for a PCN to be Considered Complete:**  
(NOTE: The 45-day NWP process will not begin until a PCN is determined complete by the Savannah District.)

1. A complete PCN Form (Appendix B).
2. All information required at NWP General Condition (GC) 31(b), "Contents of a Pre-Construction Notification."
3. A description of measures taken to avoid and/or minimize aquatic impacts and an explanation of why further avoidance and minimization measures would not be practicable.
4. A copy of the US Fish and Wildlife Service "Initial Project Scoping (IPaC)" printout identifying federally-listed threatened and endangered species that may occur in the vicinity of the project site. <http://ecos.fws.gov/ipac/>
5. A statement as to whether essential fish habitat (EFH) would be adversely impacted. <http://www.habitat.noaa.gov/protection/efh/>.
6. A statement as to whether cultural resources are known to be present on or near the project site and if a survey has been performed. <http://www.nr.nps.gov/>
7. A statement as to whether the city, county or state requires a water quality management plan for the project site prior to construction.
8. A statement that the project would comply with any applicable Federal Emergency Management Administration-approved state or local floodplain management requirements. [www.fema.gov/](http://www.fema.gov/)
9. A statement as to whether the project is located in or adjacent to a State 303(d) listed stream and if so, the name of the stream. <http://cfpub.epa.gov/surf/locate/index.cfm>
10. A statement as to whether a project is located in or adjacent to a State designated trout stream or water. [www.dnr.state.ga.us/](http://www.dnr.state.ga.us/)
11. A mitigation plan, if required. (NOTE: See Section F, below.)
12. Photographs documenting preconstruction conditions of the site. Photographs shall include waters of the US that are representative of the site and where work and/or authorized impacts would occur. (NOTE: Upon completion of the project, post construction photographs shall be attached and returned with the compliance certification form.)
13. All PCNs for projects with a culverted crossing of a perennial stream shall provide the following information: (NOTE: See Section E below for additional culvert design information.)
  - a. Culvert type and size.


b. Depth the culvert inlet and outlet culvert will be embedded in the stream bottom.

c. Designed culvert slope along the stream channel.


d. A profile of the stream bottom (longitudinal profile) beginning at least 50 feet upstream of the culvert inlet and continuing at least 50 feet downstream of the culvert outlet. Profile measurements shall begin at the head of a riffle and end at the head of a riffle. The change in elevation from head of riffle to head of riffle can be used for the designed slope.

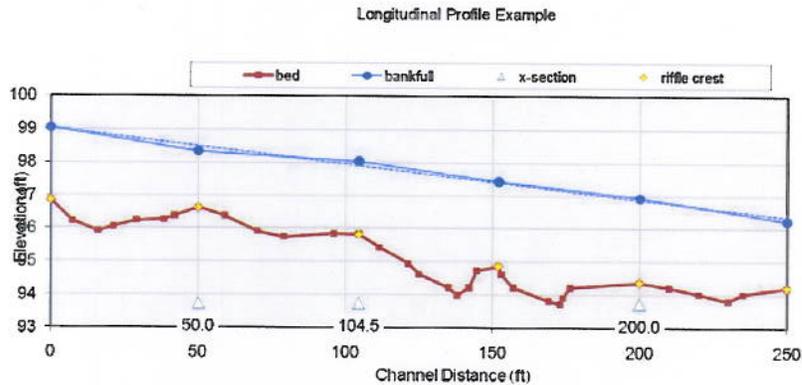

e. Three cross-sectional scale diagrams of the stream channel and banks measured at the beginning, middle, and end of the proposed culvert location. The cross-sections shall depict the stream width and height at the current water elevation, bank-full elevation and flood-plain elevation. Calculate bank-full cross-sectional area at all 3 cross-sections.

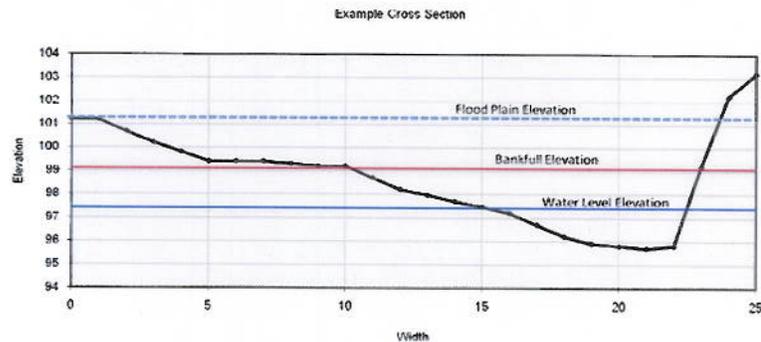

f. A scale cross-sectional diagram showing proposed as-built conditions, including location of the culvert in the channel, channel bottom elevation, road surface and areas of cut and fill. This diagram shall represent the middle cross-section.

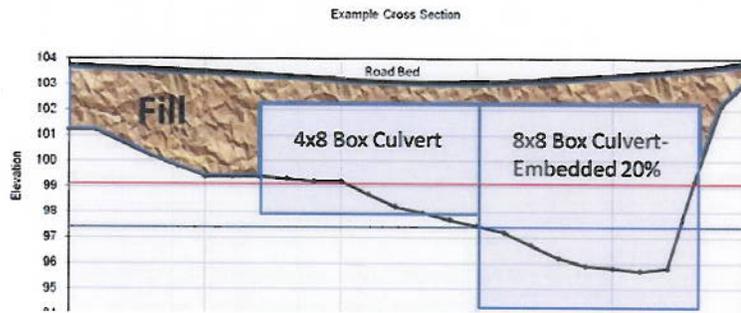

14. A PCN for a project that includes the construction of a storm water detention/retention facility in waters of the US must also include the following information:

- a. A clear statement of the basic (primary) purpose of the detention/retention facility.
- b. A description of the upland-based facility/system that will be utilized to pre-treat storm water prior to discharge into the in-stream/wetland detention/retention facility.
- c. A detailed alternatives analysis pursuant to the Section 404(b)(1) Guidelines of the Clean Water Act. This analysis must demonstrate that all other available stormwater and sediment/erosion treatment controls will be implemented and that in-stream detention/retention is the only available practicable alternative that would meet the basic project purpose. This analysis shall also include all project site specific factors that may render other stormwater detention/retention measures impractical, such as: steep slopes; rock substrate; narrow floodplain; and pre-existing development.

15. A PCN for a new construction utility line activity or linear transportation project must include the following information:

- a. A map depicting all waters of the US located in or directly adjacent to the right-of-way of the total linear project. (NOTE: The term total linear project is discussed in the NWP definition of “single and complete linear project.” For the purposes of these RCs, examples of a total linear project include, but are not limited to: a new bypass highway that begins along a highway on the east side of an urban area and terminates along the same highway on the west side of the urban area; an aerial transmission line that begins at an existing substation and terminates at a new industrial park; and a buried sewer line that begins at a new subdivision and terminates at an existing sewer main.)
- b. A map depicting the location of each “single and complete linear project” and all other work occurring in waters of the US along the right-of-way for the total linear project. This map shall clearly identify the type of work that would occur in waters of the US.
- c. A description of all work and resulting losses of and/or impacts to waters of the US as identified at Regional Condition 15.b above.

d. If a PCN for a utility line activity does not propose use of NWP 12, the PCN must include a discussion explaining why use of another NWP would be more appropriate.

e. If a PCN for a linear transportation project does not propose use of NWP 14, the PCN must include a discussion explaining why use of another NWP would be more appropriate.

16. A PCN for use of NWPs 3(b), 19 and 35 must include a "Tier I" evaluation, in accordance with the Inland Testing Manual. The "Tier I" evaluation must contain adequate information necessary to document whether there is "reason to believe" that the material to be dredged may be contaminated. If the Savannah District determines that "Tier II" testing is necessary, the PCN will not be considered complete until a "Tier II" testing report is submitted. The Inland Testing Manual is available at <http://el.erdc.usace.army.mil/elmodels/pdf/inlandb.pdf>.

17. A PCN for use of NWPs 7, 12, 14, 18, 27, 29, 31, 34, 38, 39, 41, 42 and 43 must include a delineation of all waters of the US present in the project area.

18. A PCN for use of NWP 27 must document the prior condition of the site.

19. A PCN for use of NWP 31 must include sufficient baseline and disposal site information.

20. A PCN for use of NWP 33 must include a restoration plan.

21. A PCN for use of NWP 43, for a new facility, must include a maintenance plan.

22. A PCN for use of NWP 44 must include a description of all waters impacted, measures taken to minimize impact and a reclamation plan.

#### **D. General Restrictions:**

1. NWPs cannot be used to authorize a storm water detention/retention facility in a perennial stream. A Department of the Army standard permit application is required for these projects.

2. NWPs cannot be used to authorize a storm water detention/retention facility in a state designated trout stream or water. A Department of the Army standard permit application is required for these projects.

3. NWPs cannot be used to authorize projects that would impact compensatory mitigation sites or an approved compensatory mitigation bank, unless that project's purpose is to enhance the mitigation site or bank. A Department of the Army standard permit application is required for these projects.

4. All work conducted under the NWPs shall be located, outlined, designed, constructed and operated in accordance with the requirements contained in the Georgia Erosion and Sedimentation Control Act of 1975, as amended, and the Coastal Supplement to the Georgia Stormwater Management Manual, as amended. Utilization of plans and specifications contained in "Manual for Erosion and Sediment Control, (Latest Edition)," published by the Georgia Soil

and Water Conservation Commission, will aid in achieving compliance with these requirements. The latest edition of these manuals can be accessed at [www.gaswcc.org](http://www.gaswcc.org) and [www.gaepd.org](http://www.gaepd.org).


5. No work shall be conducted under any NWP that requires discharge of wet or otherwise uncured concrete below the ordinary high water mark, unless the concrete is contained within waterproof forms until the concrete cures.

6. Use of NWPs 12, 14, 23, 33, 43 and 44 is prohibited for any project in waters of the US that support anadromous fish, or in those waters that previously supported such fish and where restoration of fish migrations and populations is possible. The established limits for these waters are listed in the attached Appendix C and include adjacent and tributary waters located within 1000 feet of these identified waters. This prohibition does not apply to NWP 12 projects that would not involve a discharge of dredged or fill material or mechanized land clearing in waters (i.e. directional bore line installation and overhead utility crossings). Exemption from this condition will be considered on a case-by-case basis, in coordination with the National Marine Fisheries Service. An exemption may be granted when it is determined that the project would have minimal impact on anadromous fish or their restoration.


#### E. Culvert Restrictions for Perennial Streams:

1. The width of the base flow culvert(s) shall be approximately equal to the average channel width. Culvert(s) shall not permanently widen/constrict the channel or reduce/increase stream depth. Multiple pipe culverts may not be used to receive base flows.

2. Bank-full flows shall be accommodated through maintenance of the existing bank-full cross-sectional area.

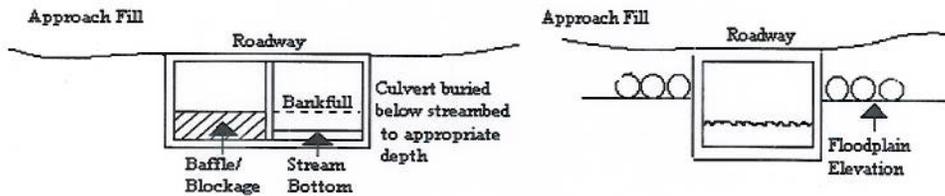

3. The upstream and downstream invert of culverts (except bottomless culverts) installed in perennial streams will be buried/embedded to a depth of 20% of the culvert height to allow natural substrate to colonize the structure's bottom and encourage fish movement.

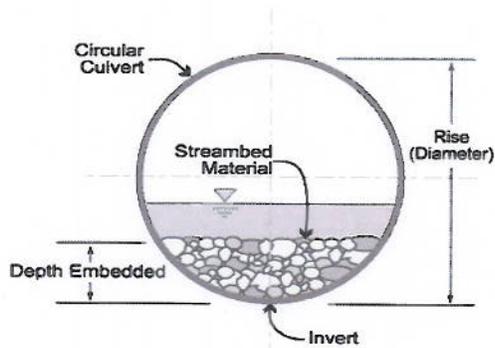

4. Culvert slope shall be consistent with average stream segment slope, but shall not exceed 4 percent.

5. Culverts shall be of adequate size to accommodate flooding and sheet flow in a manner that does not cause flooding of associated uplands or disruption of hydrologic characteristics that support aquatic sites on either side of the culvert.

6. Where adjacent floodplain is available, flows exceeding bankfull shall be accommodated by installing equalizer culvert at the floodplain elevation.

7. Unless specifically described in the PCN, use of undersized culvert to attain stormwater management or waste treatment is not authorized.

8. See Appendix D for additional culvert design information.

#### F. Mitigation:

1. **Loss of waters of the US** is defined in Section F of the NWP and primarily concerns maximum allowable impacts associated with the use of NWP. Examples of losses of waters of the US include, but are not limited to: the area of wetland, stream, ditch and/or other linear water displaced by a culvert, pipe, fill or other structure placed for a road crossing; the area of wetland, stream or other water filled by the footprint of a dam; the area of wetland, stream or other water permanently or semi-permanently flooded as the result of dam construction; the area of wetland that is excavated to create an open water area (pond); and excavation of a ditch through wetlands and the adjacent wetland area where wetland hydrology is removed. The US Army Corps of Engineers (USACE) has discretion to determine loss of waters of the US and resulting functional aquatic losses for determination of potential mitigation requirements.

2. For the purpose of clarification of these RCs, **adverse impact to waters of the US** includes, but is not limited to, losses/changes in aquatic function resulting from activities that cause a loss of waters of the US; and losses/changes in aquatic function resulting from activities that cause an impact to waters of the US, but do not result in a loss of waters. Examples of adverse impacts to waters of the US include, but are not limited to: placement of rip-rap on the bank of a stream; burying a utility line through wetland, where the wetland is restored to preconstruction contours; mechanized land clearing, where stumps are removed; and non-mechanize tree cutting, where stumps are left in place, and the wetland soil surface and/or root-

mat remain predominantly undisturbed. The USACE has discretion to determine adverse impacts to waters of the US and resulting functional aquatic losses for determination of potential mitigation requirements.

3. Compensatory mitigation plans for NWP proposed projects must be in accordance with: General Condition 22 of the NWP Program; the most recent version of the Savannah District Standard Operating Procedure, Compensatory Mitigation, Wetlands, Openwater & Streams (SOP); and the 2008 Final Compensatory Mitigation Rule (33 CFR Parts 325 and 332).

4. As stated in the Final Compensatory Mitigation Rule, the **preferred** method of compensatory mitigation for impacts to waters of the US is the purchase of credits from an approved commercial mitigation bank. Documentation of use of the Savannah District "Bank Credit Purchase Guide" is required for NWP projects involving the purchase of mitigation bank credits. Credits purchased prior to approval by the USACE may not be recognized as compensatory mitigation for authorized impacts.

5. The use of in-lieu-fee mitigation as compensation for NWP authorized impacts **may only be considered appropriate** if commercial mitigation bank credits are not available and must be authorized by the USACE prior to the purchase.

6. A compensatory mitigation plan may be required for the use of any NWP for a project that would result in an adverse impact to and/or the loss of 0.1 acre or more of wetlands and/or 100 linear feet or more of non-tidal stream.

7. For projects involving adverse impacts to and/or the loss of wetlands and streams, if either the 0.1 acre or 100 linear foot threshold is met and the USACE determines that mitigation is required, a compensatory mitigation plan is required for all adverse impacts and losses.

8. All impacts to wetlands and open waters must be calculated and reported in acres. Stream impacts must be calculated separately and reported in both linear feet **and** acres.

9. For NWPs that have both an acre limit loss of waters of the US and a linear foot stream loss limit, the acreage of stream loss (i.e., the length of the stream bed filled or excavated times the average width of the stream, from the ordinary high water mark to ordinary high water mark) applies towards that acre limit loss of waters of the US. For example, if a proposed NWP 39 activity involves filling 0.1 acre of wetlands and 100 linear feet of a stream bed with an average width of 10 feet, the acreage loss of waters of the US for that activity would be calculated as follows:  $0.1 + [(100 \times 10) / 43,560] = 0.123$  acre.

#### **G. NWP Specific Regional Conditions:**

1. NWP 3(b). Excavation of accumulated sediment or other material is not authorized by this NWP in areas adjacent to existing private or commercial dock facilities, piers, canals dug for boating access, marinas, boat ramps, or boat slips.

2. NWP 3(b). Use of rip-rap will not exceed an average of one cubic yard per running foot placed below the ordinary high water mark or the high tide line, unless the criterion is waived in writing by the District Engineer, or his assigned delegate.

3. NWP 4. Use of mechanized harvesting devices is prohibited.

4. NWP 7. Associated intake structures must employ the best practicable means to minimize entrainment or impingement of fish and other aquatic life, and the inflow velocity of intake structures is limited to not more than 0.5 foot per second.

5. NWP 7. For the purposes of this NWP, activities related to the construction of outfall structures means activities in the immediate vicinity which are necessary to construct or operate the outfall (e.g., pumps, rip rap, coffer dam). This does not include ancillary activities such as construction access roads, utility lines, buildings, etc.

6. NWP 12. Utility lines must be aligned to minimize the length of wetland/stream crossings, and/or to minimize impacts to wetlands/streams.

7. NWP 12. For buried utility lines, the width of the right-of-way corridor (i.e., impact area) cannot exceed 50 feet in wetlands. For buried utility lines subject to Federal Energy Regulatory Commission (FERC) standards, the right-of-way corridor (i.e., impact area) cannot exceed the maximum width of FERC-prescribed by standards.

8. NWP 12. Construction of individual pump stations is limited to 0.1 acre of wetland impact; substations cannot be constructed within the banks of a stream.

9. NWP 12. Excavated material that is temporarily side cast in waters of the US shall be returned to the trench or removed within 60 days, unless a 30-day extension is requested and approved by the District Engineer, or his assigned delegate.

10. NWP 12. In wetlands, excavated material shall be returned to the trench and any remaining material shall be relocated to an approved disposal site. Substrate containing roots, rhizomes, seeds, etc., must be kept viable and replaced at the surface of the excavated site. Stream banks that are cleared of vegetation shall be stabilized with deep-rooted native species similar to nearby reference sites. Each individual wetland/stream project shall be stabilized immediately following completion of utility line placement at that project.

11. NWP 12. Anti-seep collars, or other structures designed to prevent under-draining, will be installed on all buried utility lines in wetlands. If no anti-seep/drain device(s) is proposed, the applicant must provide information documenting that such a device is not required to prevent wetland drainage.

12. NWP 12. Isolation methods (flume/coffer dam or pumped diversion) will be used to install utility lines in perennial streams. Flume/coffer dam isolation methods may include aqua-dams, pea gravel, sand bags, cured concrete blocks, steel or wood wall, sheet pile, or similar design. Flume/coffer dam isolation shall be done in stages, moving dams as needed so that downstream reaches are not dewatered. Material to build granular coffer dams shall be clean and

washed, and shall not be taken from the stream channel. Pumped diversion shall not be used where there are fish passage concerns; before pumping water from the work area, fish shall be salvaged from the isolated area and returned safely to the downstream portion of the watercourse. The area where the pump discharges shall be lined with clean rock to prevent erosion and release of suspended sediments downstream. For both methods, streambanks shall be stabilized with geotextile fabric, at a minimum, before the isolation methods are removed.

13. NWP 12. Permanent above-grade access/maintenance roads and above-grade utility lines (excluding overhead electric lines) are not authorized by this NWP. Permanent at-grade access roads shall impact no more than 200 linear feet of wetland at an individual wetland crossing. NWP 14 cannot be used in conjunction with NWP 12 to extend a road crossing beyond 200 feet.

14. NWP 12. For the purpose of calculating the loss of waters of the US resulting from the construction of utility line access/maintenance roads associated with a total linear project, the geographic area of consideration will be a "State of Georgia Hydrologic Map Cataloging Unit (i.e., 8-Digit Unit)." Loss of waters of the US will be considered for all utility line access/maintenance roads associated with a total linear project. The total loss of waters of the US for a total linear project in a Cataloging Unit cannot exceed 10 acres of wetlands and/or 1500 linear feet of stream. For total linear project loss calculations, the acreage of stream loss will not be included in the 10 acre wetland limit.

15. NWP 12. If adverse impacts and/or loss of waters of the US resulting from the construction of a total linear project would cumulatively be 0.1 acre or more of wetland and/or 100 or more linear feet of stream, mitigation may be required for all impacts and losses for the total linear project. Examples of impacts to and losses of waters of the US are discussed at Regional Conditions F 1 and 2 above.

16. NWP 14. For the purpose of calculating cumulative loss of waters of the US resulting from the construction of a total linear project, the geographic area of consideration will be an individual "State of Georgia Hydrologic Map Cataloging Unit (i.e., 8-Digit Unit)." The total loss of waters of the US resulting from total linear project in a Cataloging Unit cannot exceed 10 acres of wetlands and/or 1500 linear feet of stream. For total linear project total loss calculations, the acreage of stream loss will not be included in the 10 acre limit.

17. NWP 14. If adverse impacts and/or loss of waters of the US resulting from the construction of a total linear project (multiple single and complete linear projects) would cumulatively be 0.1 acre or more of wetland and/or 100 or more linear feet of stream, mitigation may be required for all impacts and losses for the total linear project. Examples of impacts to and losses of waters of the US are discussed at Regional Conditions F 1 and 2 above.

18. NWP 14. A single and complete linear project (a single crossing of waters of the US) cannot result in the loss of 300 or more linear feet of perennial stream.

19. NWP 14. Ditches and medians associated with road projects must be designed to prevent drainage of wetlands, and finished road elevations cannot be lower than surrounding wetlands.

20. NWP 14. All road projects constructed through wetlands/streams must begin on an existing natural high ground area (upland) and end on existing natural high ground.

21. NWP 23. This NWP cannot be used for projects that would impact more than 500 linear feet of stream or 1.5 acres of wetlands for construction of a single and complete linear or non-linear project; or more than 1,500 feet of stream or 10 acres of wetlands for a total linear project within a Cataloging Unit.

22. NWP 37. All projects authorized under NWP 37 must be under construction or under contract for construction within 1 year of authorization. If not, the permittee must resubmit the PCN to the Savannah District and meet related notification requirements (e.g. to Georgia DNR) prior to commencing the activity.

23. NWP 37. This NWP cannot be used for projects that involve removal of debris other than in the immediate up and downstream reaches (300 feet) adjacent to bridges and other stream crossings; bank clearing which involves complete removal of trees and/or removal of logs/dead trees which are buried in the bank; channel deepening beyond original bottom; and/or levee construction.

24. NWP 41. Use of NWP 41 is prohibited for projects that would cause or perpetuate drainage of wetlands or other waters of the US, and/or result in the removal or modification of riparian vegetation that provides shade, bank stabilization, nutrients, cover, or other features that are beneficial to fish and wildlife.

25. NWP 41. This NWP does not authorize work in natural streams that have been subjected to some previous channelization.

26. NWP 41. Excavated materials shall be removed from the site. However, excavated materials may be placed on existing adjacent berms or on other previously used disposal sites, provided no additional wetlands are impacted and the material is stabilized to prevent erosion.

27. NWP 42. This NWP does not authorize golf courses or other projects that require use of herbicides, insecticides, fertilizers and/or other similar potentially toxic or hazardous materials, unless effective containment and/or barriers are to be implemented and fully maintained for the duration of the project, to prevent such contamination from entering waters of the US. The PCN must include documentation of compliance with this condition.

28. NWP 43. A stormwater management facility cannot result in the loss of more than 1/3 acre of wetlands. Cumulative project-related wetland impacts, including permanent, temporary, and/or secondary impacts (e.g., temporary storm water retention) are limited to 1 acre of wetlands. Impacts that result in the conversion of forested wetlands to a scrub shrub, emergent or some other shallow water wetland community are not considered temporary and/or secondary.

29. NWP 45. All work verified under this NWP associated with repair, rehabilitation or replacement of structures or fills must be completed within two years of the storm, flood, fire or other discrete event. If after two years from the discrete event, the authorized activities have not

been completed, the permittee must submit a PCN requesting authorization under a new NWP. This NWP only authorizes activities within two years of the discrete event.

Appendices:

- A. Georgia DNR Requirements and Notification Procedures
- B. Pre-Construction Notification Form
- C. List of Anadromous Fisheries Waters
- D. USFWS Culvert Design Information

Useful Websites:

<http://www.nr.nps.gov/>

[http://athens.fws.gov/endangered/counties\\_endangered.html](http://athens.fws.gov/endangered/counties_endangered.html)

[www.gaswcc.org](http://www.gaswcc.org)

[www.fema.gov/](http://www.fema.gov/)

<http://crd.dnr.state.ga.us/>

<http://cfpub.epa.gov/surf/locate/index.cfm>

[www.dnr.state.ga.us](http://www.dnr.state.ga.us)

<http://www.epa.gov/region4/water/watersheds/priority.htm#FL>

**Georgia Department of Natural Resources  
Requirements and Notification Procedures  
Nationwide Permit Projects**

State of Georgia Buffer Requirements. Nationwide Permit (NWP) authorized projects may require a variance from the Georgia Environmental Protection Division (EPD) prior to conducting land disturbing activities or placement of materials within the State-mandated buffer (O.C.G.A. 12-7-6(b)(15) of “The Erosion and Sedimentation Act of 1975”). Please visit Georgia EPD’s website (<http://www.gaepd.org/>), or contact Georgia EPD at (404) 675-6240 or (912) 264-7284 (Coastal District), for further guidance on buffer determinations and variances. If Georgia EPD or the appropriate Local Issuing Authority (LIA) has determined that a buffer variance is required for the NWP project, provide the Georgia EPD assigned buffer variance application file number with your notification to Georgia EPD. If Georgia EPD or the appropriate LIA has determined that a buffer variance is not required for the NWP project, submit the determination letter or record of correspondence received from the Georgia EPD or LIA with your notification to Georgia EPD.

Notification Requirements. For uses of NWPs requiring submission of a Pre-Construction Notification (PCN) to the Savannah District prior to commencing work in waters of the United States (US), a copy of the PCN with project plans must also be submitted to the Georgia Department of Natural Resources (DNR), Environmental Protection Division (EPD) and, where applicable, to the Georgia DNR, Coastal Resources Division (CRD). For NWP authorized projects that do not require submission of a PCN to the Savannah District, a completed copy of the attached “Georgia Department of Natural Resources Notification Form” must be submitted to Georgia EPD and, where applicable, to Georgia CRD, prior to commencing work.

Georgia DNR, Environmental Protection Division. For projects located in Georgia EPD’s 24-County Coastal District (Appling, Atkinson, Bacon, Brantley, Bryan, Bulloch, Camden, Candler, Charlton, Chatham, Clinch, Coffee, Effingham, Evans, Glynn, Jeff Davis, Liberty, Long, McIntosh, Pierce, Tattnall, Toombs, Ware and Wayne County), send PCNs and project plans or Notification Forms to: Georgia DNR Environmental Protection Division, Coastal District, Attention: Wetland Management Unit, 400 Commerce Center Drive, Brunswick, GA 31523-8251, Phone: (912) 261-3924, Fax: (912) 262-3160.

For projects in all other counties, send PCNs and project plans or Notification Forms to: Georgia DNR Environmental Protection Division, Attention: Wetland Management Unit 4220 International Parkway, Suite 101, Atlanta, GA 30354-3902, Phone: (404) 675-1752 Fax: (404) 675-6244.

Georgia DNR, Coastal Resources Division. For projects located in the 11-County Coastal Area (Bryan, Brantley, Camden, Charlton, Chatham, Effingham, Glynn, Liberty, Long, McIntosh and Wayne Counties), send PCNs and project plans or Notification Forms to: Georgia DNR Coastal Resources Division, Attention: Habitat Management Program Manager, One Conservation Way, Brunswick, Georgia 31520-8686, Phone: (912) 264-7218, Fax: (912) 262-3131.



**US ARMY CORPS OF ENGINEERS, SAVANNAH DISTRICT  
2012 PRE-CONSTRUCTION NOTIFICATION (PCN) FORM  
FOR USE OF CERTAIN NATIONWIDE PERMITS (NWP)**

USE OF NWP NUMBER(s) \_\_\_\_\_ Date \_\_\_\_\_

APPLICANT/PROPERTY OWNER \_\_\_\_\_

Phone(hm/bus) \_\_\_\_\_ FAX \_\_\_\_\_ E-Mail \_\_\_\_\_

Address \_\_\_\_\_ City \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_

AGENT/CONSULTANT \_\_\_\_\_

Phone(hm/bus) \_\_\_\_\_ FAX \_\_\_\_\_ E-Mail \_\_\_\_\_

Address \_\_\_\_\_ City \_\_\_\_\_ State \_\_\_\_\_ Zip Code \_\_\_\_\_

PROJECT LOCATION/ADDRESS \_\_\_\_\_

City \_\_\_\_\_ County \_\_\_\_\_ Subdivision \_\_\_\_\_ Lot \_\_\_\_\_

Latitude \_\_\_\_\_ Longitude \_\_\_\_\_ Hydrologic Map Cataloging Unit \_\_\_\_\_

Nearest Named Stream, River or Other Waterbody \_\_\_\_\_

PROJECT DESCRIPTION \_\_\_\_\_

---



---



---

**PROJECT AREA AND IMPACT INFORMATION**

	PROJECT AREA		IMPACTS TO US WATERS	
	ACRES	LINEAR FEET	ACRES	LINEAR FEET
<b>TOTAL PROJECT AREA</b>		N/A	N/A	N/A
<b>UPLAND</b>		N/A	N/A	N/A
<b>WETLAND</b>		N/A		N/A
<b>OPEN WATER</b>		N/A		N/A
<b>PERENNIAL STREAM</b>				
<b>INTERMITTENT STREAM</b>				
<b>EPHEMERAL STREAM</b>				
<b>MAN-MADE DITCHES</b>				

**WETLAND/STREAM IMPACT AVOIDANCE/MINIMIZATION (RC C.3)**

---



---



---



---

WATER QUALITY MANAGEMENT PLAN STATEMENT (RC C.7) \_\_\_\_\_

FLOODPLAIN MANAGEMENT STATEMENT (RC C.8) \_\_\_\_\_

MAPS, DRAWINGS AND OTHER SUPPLEMENTAL INFORMATION. For the following questions include information with the PCN necessary to adequately comply with the referenced RC or explain/address the answer provided.

1. PCN submitted to the Georgia EPD? (RC A and Appendix A) Yes \_\_\_\_\_ No \_\_\_\_\_
2. PCN submitted to the Georgia CRD? (RC A and Appendix A) Yes \_\_\_\_\_ No \_\_\_\_\_ N/A \_\_\_\_\_
3. Has Georgia EPD or the appropriate Local Issuing Authority (LIA) determined whether or not a buffer variance is required for the project? (RC A and Appendix A) Yes \_\_\_\_\_ No \_\_\_\_\_
4. Are federally protected species present on the project area? (RC C.4) Yes \_\_\_\_\_ No \_\_\_\_\_
5. Will EFH be impacted by the project? (RC C.5) Yes \_\_\_\_\_ No \_\_\_\_\_
6. Are cultural resources located on or near the project area? (RC C.6) Yes \_\_\_\_\_ No \_\_\_\_\_
7. Is the project area located in, adjacent to, or upstream and within 10 linear miles of a 303(d) listed water? (RC C.9) Yes \_\_\_\_\_ No \_\_\_\_\_
8. Is the project area located in or adjacent to a trout stream? (RC C.10) Yes \_\_\_\_\_ No \_\_\_\_\_
9. Is compensatory mitigation required? (RCs C.11 and F.1-9) Yes \_\_\_\_\_ No \_\_\_\_\_
10. Are culverts proposed in streams and/or wetlands? (RC C.12 and E.1-8) Yes \_\_\_\_\_ No \_\_\_\_\_
11. In-stream/wetland storm water management proposed? (RC C.13) Yes \_\_\_\_\_ No \_\_\_\_\_
12. Will the project be phased (additional wetland/stream impacts in the future)? Yes \_\_\_\_\_ No \_\_\_\_\_
13. Have authorized wetland/stream impacts occurred in the project area? Yes \_\_\_\_\_ No \_\_\_\_\_
14. Have unauthorized wetland/stream impacts occurred in the project area? Yes \_\_\_\_\_ No \_\_\_\_\_
15. Is the project area located within 5 miles of an airport? Yes \_\_\_\_\_ No \_\_\_\_\_
16. Is the project area in a USEPA Priority Watershed?  
<http://www.epa.gov/region4/water/watersheds/priority.html> Yes \_\_\_\_\_ No \_\_\_\_\_

**IMPORTANT NOTES:**

1. Refer to Section "C" of the Savannah District 2012 Nationwide Permit Regional Conditions for a complete list of all information that must be submitted as an attachment to this PCN.
2. All maps and drawings that are attached to this PCN must be submitted on 8 ½ X 11-inch paper. Supplemental maps and drawings larger than 8 ½ X 11 may also be submitted for clarity.

## Anadromous Fish Waters in Georgia

1. Savannah River from the Atlantic Ocean to the Augusta Diversion Dam, including portions of Ebenezer, Brier and Butler Creeks. Anadromous fish restoration is in progress on the Savannah River and the limit of anadromous fish waters may be extended to include Stevens Creek and the Savannah River to Thurmond Dam. Currently there is limited upstream passage through the lock chamber at New Savannah Bluff Lock and Dam.
2. Ogeechee River from Ossabaw Sound to the I-20 Bridge, including portions of Black, Mill, Ogeechee, Horse, Williamson Swamp and Rocky Comfort Creeks.
3. Canoochee River from its confluence with the Ogeechee River and its upper branches, including Lotts and Little Lotts Creeks above the I-16 Bridge.
4. Medway River from St. Catherines Sound including Mt. Hope Creek.
5. North Newport River from St. Catherines Sound, including lower portions of Peacock Creek.
6. South Newport River from Sapelo Sound to the Long-McIntosh County line.
7. Darien River from Dobby Sound to include Cathead Creek.
8. Altamaha River from the Atlantic Ocean to its confluence with the Oconee and Ocmulgee Rivers, including portions of Doctor, Penholoway, Beards, Tenmile and Cobb Creeks.
9. Ohoopsee River from its confluence with the Altamaha River to the US 319 bridge near Wrightsville, including portions of Rocky and Pendleton Creeks, and Little Ohoopsee River to the US 319 Bridge.
10. Oconee River from its with the Altamaha River to the Lake Sinclair Dam, including portions of Turkey, Rocky, Big Sandy, Commissioner and Buffalo Creeks.
11. Ocmulgee River from its with the Altamaha and Oconee rivers to the East Juliette hydropower dam, including portions of Horse/Alligator, House, Cedar, Bluff, Big, Big Indian, Echeconnee and Tobesofkee Creeks.
12. Little Ocmulgee River from its confluence with the Ocmulgee River to the dam at Little Ocmulgee Lake in McRae, including portions of Sugar and Alligator Creeks.
13. Brunswick River from St. Simons Sound, including portions of Turtle and Buffalo Rivers.
14. Satilla River from St. Andrew Sound to the GA 158 Bridge west of Douglas, including portions the Alabaha River and White Oak, Buffalo, Big Satilla, Little Satilla, Colemans, Bishop, Little Hurricane, Hog, Seventeen Mile, Red Bluff and Pudding Creeks.
15. Little Satilla River from Jekyll Sound to the US 17 bridge.
16. St. Marys River from the Atlantic Ocean to near the Florida/Georgia border at the Highway 2/94 bridge, including portions of South Prong and Middle Prong.
17. Chattahoochee River from Lake Seminole to George W. Andrews Lock and Dam.



## Culvert Designs that Restrict Movement of Fish and other Aquatics

There are three common culvert design flaws that create migration barriers for fish and other aquatic species:

- Perched culverts with excess drop at the outlet;
- Poorly-sized or installed culverts that create high water velocity, turbulence, and/or inadequate water depths within the culvert; and
- Debris accumulation at the culvert inlet.


**Perched Culverts:** A perched culvert's downstream end hangs above the level of the stream bottom, so that water leaving the culvert forms a waterfall at the culvert lip. Perching can occur when culverts are installed directly on the stream bottom, rather than being sunk into the bed, or from years of channel scour caused by an undersized culvert.



**Poorly-sized or Installed Culverts:** Undersized culverts restrict natural stream flows, particularly during floods. Water exits the structure at a high velocity, causing channel and bank erosion. Overly-wide culverts spread a stream's flow out over a wide area, so water depths are too shallow for many fish and other aquatic organisms to swim or move through.



**Multiple Pipe Culverts:** Culverts designed with two or more widely-spaced pipes to move a stream's flow are prone to clogging, which may inhibit the movement of animals through the crossing and increase water velocity in the remaining pipes. Clogging can cause flooding into roadside ditches, resulting in problems for roadways and hazardous conditions for motorists. Clogged entries sometimes cause water to scour the channel banks, causing bank erosion and often increased maintenance costs. Many multiple pipe culverts are undersized to carry normal or flood flows.

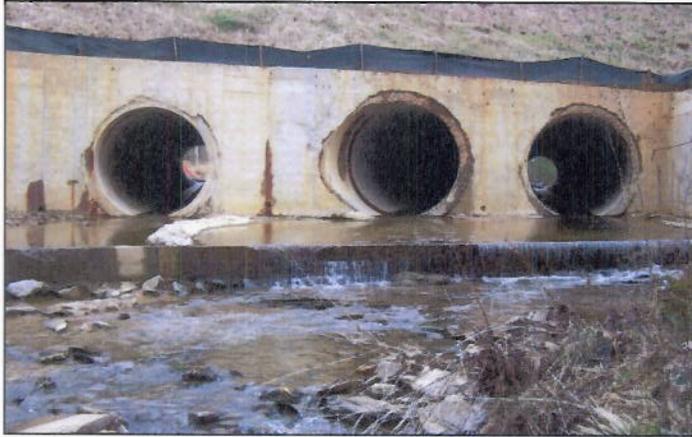

### **Aquatic-Passage Friendly Culvert Designs**

In general, bridges have less impact than culverts on aquatic species movement, because they typically do not constrict a stream channel to as great a degree as culverts and usually allow for vertical movement of the streambed. Bottomless culverts may be a good alternative for fish passage where foundation conditions allow their construction and width criteria can be met. All culverts should be designed to meet appropriate hydraulic capacity and structural integrity criteria.

Several methods exist for designing culverts for fish passage, including methods that focus on hydraulic design and stream simulation. The recommendations below borrow from, but do not replace, these more rigorous culvert design protocols.


The Fish and Wildlife Service recommends that culverts designed to facilitate movement of aquatic species should:

- Have a width equal to or slightly greater than the average streambed width
- Be installed at a relatively flat gradient
- Be countersunk (embedded) below the channel bed at least 20% of the culvert's diameter or rise
- Provide adequate flood capacity with extra culverts at bankfull elevation or in the floodplain.





These bottomless or embedded culverts were sized so they are wide enough to carry baseflows without altering stream depth (i.e., width equal to or slightly greater than the average channel width).

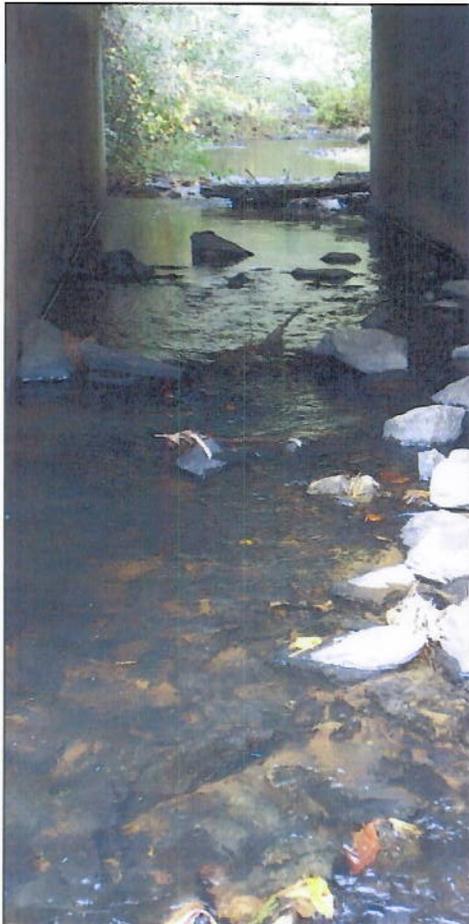

The culvert is installed at a relatively flat gradient to allow substrate to colonize the culvert's interior and maintain natural flow velocity.

Culverts, set at bankfull elevation (top) or with baffles constructed at bankfull height carry flood waters but do not overwiden the channel at baseflow.

**Georgia Department of Natural Resources**

2 Martin Luther King Jr. Dr., S.E., Suite 1152 East, Atlanta, Georgia 30334-9000

Mark Williams, Commissioner

Judson H. Turner, Director

Environmental Protection Division

404/656-4713

FAX: 404/651-5778

March 12, 2012

Mr. Russell Kaiser, Chief  
Regulatory Division  
U.S. Army Corps of Engineers  
Savannah District  
100 W. Oglethorpe Avenue  
Savannah, GA 31402-0889

Re: Water Quality Certification  
2012 Reauthorization of Nationwide Permits  
Statewide

Dear Mr. Kaiser:

Pursuant to Section 401 of the Federal Clean Water Act, the State of Georgia issues this certification to the U.S. Army Corps of Engineers, Savannah District for reauthorization of the Nationwide Permits. This reauthorization extends for a period of five years from March 19, 2012.


The State of Georgia certifies that there is no applicable provision of Section 301; no limitation under Section 302; no standard under Section 306; and no standard under Section 307, for the applicant's activity. The State of Georgia certifies that the applicant's activity will comply with all applicable provisions of Section 303.

This certification is contingent upon the following conditions:

1. All work performed during construction will be done in a manner so as not to violate applicable water quality standards.
2. No oils, grease, materials or other pollutants will be discharged from the construction activities that reach public waters.
3. This certification is contingent upon satisfaction of the Savannah District's Regional Conditions, including the Appendix A provisions requiring prior notification to Georgia EPD before the commencement of NWP authorized projects.
4. For bank stabilization projects conducted under NWP 13, particularly those that involve work in state buffers, applicants should consult Georgia EPD's Streambank and Shoreline Stabilization Guidance, available at <http://georgiaepd.org/Documents/techguide.html>.
5. Where the Savannah District grants a waiver to exceed the project impact limits authorized under Nationwide Permits 13, 21, 29, 36, 39, 40, 42, 43, 44, 50, 51 or 52, Georgia EPD reserves the right to review such projects for consistency with Georgia's water quality rules, and where necessary, to issue individual 401 water quality certification for qualified projects.

6. Georgia EPD may require submission of a formal application for individual 401 water quality certification for any project if it is determined, based upon consideration of Georgia's water quality rules, that the project is likely to have a significant adverse effect upon water quality.

This certification does not relieve the applicant of any obligation or responsibility for complying with the provisions of any other laws or regulations of other federal, state or local authorities.

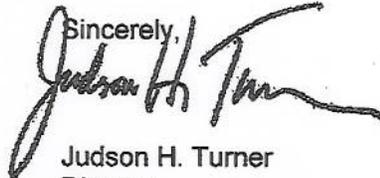Sincerely,  
  
Judson H. Turner  
Director

cc: Mr. Richard Morgan, USACE  
Ms. Sarah Wise, USACE  
Mr. Bob Lord, USEPA  
Ms. Sandy Tucker, USFWS  
Ms. Kelie Moore, CRD



MARK WILLIAMS  
COMMISSIONER

A.G. 'SPUD' WOODWARD  
DIRECTOR

March 13, 2012

USACE Savannah District Regulatory  
Attn: Mr. Russell Kaiser, Chief  
100 West Oglethorpe Avenue  
Savannah, Georgia 31401-3640

RE: Consistency Determination Conditional Concurrence for Reauthorization of Nationwide Permits in Georgia, February 21, 2012 Federal Register Notice, # SAS-2011-00130

Dear Mr. Kaiser:

Staff of the Georgia Coastal Management Program has reviewed your January 23, 2012 request for federal consistency determination concurrence under the Coastal Zone Management Act for reauthorization of the use of Nationwide Permits (NWP) in Georgia as described in the February 21, 2012 Federal Register notice and draft Savannah District Regional Conditions.

The Program concurs with your consistency determination with the condition that all Savannah District Regional Conditions are satisfied, including the Regional Condition A: Georgia Department of Natural Resources Notification. Regional Condition A requires submission of a Pre-Construction Notification (PCN) and project plans to the Georgia Department of Natural Resources' Coastal Resources Division (GaDNR/CRD) for use of some NWPs and requires submission of a GaDNR Notification Form to GaDNR/CRD for the use of other NWPs prior to beginning work, on any and all NWP-authorized project that are located anywhere in Bryan, Brantley, Camden, Charlton, Chatham, Effingham, Glynn, Liberty, Long, McIntosh or Wayne counties.

The Georgia Coastal Management Program concurs with your federal consistency determination for reauthorization of NWPs in Georgia under the following conditions:

- 1) A PCN and project plan must be submitted to GaDNR/CRD when in the 11-county coastal area for use of any NWP within 2,000 feet of a National Wildlife Refuge, any National Park Service Property, a National Estuarine Research Reserve, a Georgia State Park, or an approved mitigation bank.
- 2) A PCN and project plan must be submitted to GaDNR/CRD when in the 11-county coastal area for use of NWP 3(a)<sup>i</sup> 3(b), 3(c)<sup>ii</sup>, 5<sup>iii</sup>, 6<sup>iv</sup>, 7, 8, 11, 12, 13<sup>v</sup>, 14, 15, 17, 18<sup>vi</sup>, 21, 22<sup>vii</sup>, 23, 27, 29, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41<sup>viii</sup>, 42, 43, 44, 45, 46, 48, 49, 50, 51, and 52.
- 3) If the project is not located within 2,000 feet of a National Wildlife Refuge, National Park Service Property, National Estuarine Research Reserve, Georgia State Park, or approved mitigation bank, a GaDNR Notification Form must be submitted to

GaDNR/CRD when in the 11-county coastal area for use of NWP 1, 2, 3(a)<sup>ix</sup>, 3(c)<sup>x</sup>, 4,<sup>xi</sup> 5<sup>xii</sup>, 6<sup>xiii</sup>, 9, 10, 13<sup>xiiii</sup>, 16, 18<sup>xiv</sup>, 19<sup>xv</sup>, 20, 22<sup>xvi</sup>, 24, 25, 28, 30, and 41<sup>xvii</sup>.

Conditional concurrence with this federal consistency determination does not relieve users of a Nationwide Permit from any obligation or responsibility for complying with provisions of any other laws or regulations of other federal, state, or local authorities. A Coastal Marshlands Protection Act Permit, Revocable License Agreement, or other State permission may be required before an NWP-authorized activity may commence in the 11-county coastal area. Please feel free to contact Brad Gane or me if we can be of further assistance.

Sincerely,



A.G. "Spud" Woodward  
Director

SW/km

---

<sup>i</sup> For impacts to 0.1 acre or more of wetlands/open water and/or 100 linear feet or more of stream.

<sup>ii</sup> For impacts to 0.1 acre or more of wetlands/open water and/or 100 linear feet or more of stream.

<sup>iii</sup> For impacts to 0.1 acre or more of wetlands/open water and/or 100 linear feet or more of stream.

<sup>iv</sup> For impacts to 0.1 acre or more of wetlands/open water and/or 100 linear feet or more of stream.

<sup>v</sup> When in a perennial stream; for impacts to 0.1 acre or more of wetlands/open water and/or 100 linear feet or more of stream; when it involves discharges into special aquatic sites; or when it is in excess of 500 feet in length or will involve discharge of greater than an average of one cubic yard per running foot along the bank below the plane of the ordinary high water mark or high tide line.

<sup>vi</sup> When the discharge or the volume of area excavated exceeds 10 cubic yards below the plane of the ordinary high water mark or the high tide line, or the discharge is in a special aquatic site, including wetlands.

<sup>vii</sup> When the vessel is listed or eligible for listing in the National Register of Historic Places, or the activity is conducted in a special aquatic site, including coral reefs and wetlands.

<sup>viii</sup> For impacts to 0.1 acre or more of wetlands/open water and/or 100 linear feet or more of stream or when more than 500 linear feet of drainage ditch will be reshaped.

<sup>ix</sup> For impacts to less than 0.1 acre of wetlands/open water and less than 100 linear feet of stream.

<sup>x</sup> For impacts to less than 0.1 acre of wetlands/open water and less than 100 linear feet of stream.

<sup>xi</sup> For impacts to less than 0.1 acre of wetlands/open water and less than 100 linear feet of stream.

<sup>xii</sup> For impacts to less than 0.1 acre of wetlands/open water and less than 100 linear feet of stream.

<sup>xiii</sup> When not in a perennial stream; for impacts to less than 0.1 acre of wetlands/open water and less than 100 linear feet of stream; when it does not involve discharges into special aquatic sites; and when it is less than 500 feet in length and will not involve discharge of more than an average of one cubic yard per running foot along the bank below the plane of the ordinary high water mark or high tide line.

<sup>xiv</sup> When the discharge or the volume of area excavated does not exceed 10 cubic yards below the plane of the ordinary high water mark or the high tide line and the discharge is not in a special aquatic site, including wetlands.

<sup>xv</sup> For impacts to less than 0.1 acre of wetlands/open water and/or less than 100 linear feet of stream.

<sup>xvi</sup> When the vessel is not listed or eligible for listing in the National Register of Historic Places and the activity is not conducted in a special aquatic site, including coral reefs and wetlands.

<sup>xvii</sup> For impacts to less than 0.1 acre of wetlands/open water and less than 100 linear feet of stream and when less than 500 linear feet of drainage ditch will be reshaped.

## Index of Nationwide Permits, Conditions and Definitions

### Nationwide Permits

1. Aids to Navigation
2. Structures in Artificial Canals
3. Maintenance
4. Fish and Wildlife Harvesting, Enhancement, and Attraction Devices and Activities
5. Scientific Measurement Devices
6. Survey Activities
7. Outfall Structures and Associated Intake Structures
8. Oil and Gas Structures on the Outer Continental Shelf
9. Structures in Fleeting and Anchorage Areas
10. Mooring Buoys
11. Temporary Recreational Structures
12. Utility Line Activities
13. Bank Stabilization
14. Linear Transportation Projects
15. U.S. Coast Guard Approved Bridges
16. Return Water From Upland Contained Disposal Areas
17. Hydropower Projects
18. Minor Discharges
19. Minor Dredging
20. Response Operations for Oil and Hazardous Substances
21. Surface Coal Mining Activities
22. Removal of Vessels
23. Approved Categorical Exclusions
24. Indian Tribe or State Administered Section 404 Programs
25. Structural Discharges
26. [Reserved]
27. Aquatic Habitat Restoration, Establishment, and Enhancement Activities
28. Modifications of Existing Marinas
29. Residential Developments
30. Moist Soil Management for Wildlife
31. Maintenance of Existing Flood Control Facilities
32. Completed Enforcement Actions
33. Temporary Construction, Access, and Dewatering
34. Cranberry Production Activities
35. Maintenance Dredging of Existing Basins
36. Boat Ramps
37. Emergency Watershed Protection and Rehabilitation
38. Cleanup of Hazardous and Toxic Waste
39. Commercial and Institutional Developments
40. Agricultural Activities
41. Reshaping Existing Drainage Ditches
42. Recreational Facilities

43. Stormwater Management Facilities
44. Mining Activities
45. Repair of Uplands Damaged by Discrete Events
46. Discharges in Ditches
47. [Reserved]
48. Commercial Shellfish Aquaculture Activities
49. Coal Remining Activities
50. Underground Coal Mining Activities
51. Land-Based Renewable Energy Generation Facilities
52. Water-Based Renewable Energy Generation Pilot Projects

#### Nationwide Permit General Conditions

1. Navigation
2. Aquatic Life Movements
3. Spawning Areas
4. Migratory Bird Breeding Areas
5. Shellfish Beds
6. Suitable Material
7. Water Supply Intakes
8. Adverse Effects from Impoundments
9. Management of Water Flows
10. Fills Within 100-Year Floodplains
11. Equipment
12. Soil Erosion and Sediment Controls
13. Removal of Temporary Fills
14. Proper Maintenance
15. Single and Complete Project
16. Wild and Scenic Rivers
17. Tribal Rights
18. Endangered Species
19. Migratory Bird and Bald and Golden Eagle Permits
20. Historic Properties
21. Discovery of Previously Unknown Remains and Artifacts
22. Designated Critical Resource Waters
23. Mitigation
24. Safety of Impoundment Structures
25. Water Quality
26. Coastal Zone Management
27. Regional and Case-by-Case Conditions
28. Use of Multiple Nationwide Permits
29. Transfer of Nationwide Permit Verifications
30. Compliance Certification
31. Pre-Construction Notification

## Definitions

Best management practices (BMPs)  
Compensatory mitigation  
Currently serviceable  
Direct effects  
Discharge  
Enhancement  
Ephemeral stream  
Establishment (creation)  
High Tide Line  
Historic property  
Independent utility  
Indirect effects  
Intermittent stream  
Loss of waters of the United States  
Non-tidal wetland  
Open water  
Ordinary high water mark  
Perennial stream  
Practicable  
Pre-construction notification  
Preservation  
Re-establishment  
Rehabilitation  
Restoration  
Riffle and pool complex  
Riparian areas  
Shellfish seeding  
Single and complete linear project  
Single and complete non-linear project  
Stormwater management  
Stormwater management facilities  
Stream bed  
Stream channelization  
Structure  
Tidal wetland  
Vegetated shallows  
Waterbody